


STRATOS D 6 BAR Abrasion resistant hose

Rubber cement delivery and dry food hose

Suitable for delivery of very abrasive materials such as cement, sand and animal feed. With conductive tube. Resistance to wear, acc to DIN ISO 4649 50 - 60 mm³.

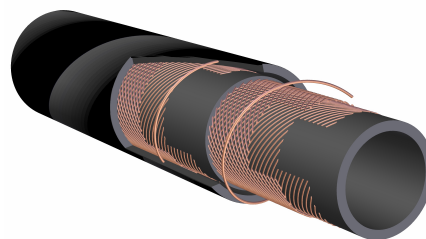

Cover	NR
Tube	NR
Material inlay	Textile
Number of reinforcement	2
Static wire	Yes
Colour cover	Black
Colour tube	Black
Electrically conductive tube	R < 10 ⁶ Ω
Min. temperature	-40 °C
Max. temperature	+70 °C
Abrasion loss acc. to DIN ISO 4649	50-60 mm ³

Product number	Product	Inner diameter (mm)	Outer diameter (mm)	Working pressure (bar)	Burst pressure (bar)	Length (m)	Weight (kg/m)
1600305	STRATOS D 6 BAR Abrasion resistant hose	75	93	6	18	30	2,8
1600310	STRATOS D 6 BAR Abrasion resistant hose	80	100	6	18	40	3,2
1600303	STRATOS D 6 BAR Abrasion resistant hose	90	110	6	18	20	3,68
1600304	STRATOS D 6 BAR Abrasion resistant hose	90	110	6	18	40	3,68
1600308	STRATOS D 6 BAR Abrasion resistant hose	100	120	6	18	20	4,05
1600309	STRATOS D 6 BAR Abrasion resistant hose	100	120	6	18	40	4,05